


自潤式線性滑軌高組裝
(法蘭型、加長型)

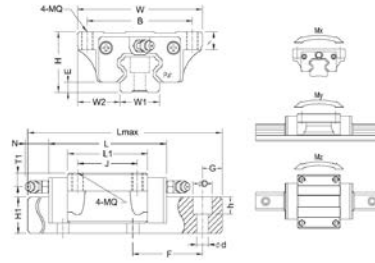

型號	組合尺寸 mm				滑座尺寸 mm							滑軌尺寸 mm			
	H	W	W2	E	L	BxJ	MQxℓ	L1	油孔	T1	(N)	W1	H1	F	dxDxh
BRC15A BRD15A	24	47	16	4.6	66	38x30	M5x8	40	Ø3	4.3	5	15	14	60	4.5x7.5x5.8
56															
BRC20A BRD20A	30	63	21.5	5	77.8	53x40	M6x9	48.8	M6x1	7	15.6	20	18	60	6x9.5x9
67.8					63.4										
92.4															
82.4															
BRC25A BRD25A	36	70	23.5	7	88	57x45	M8x12	57	M6x1	7.8	15.6	23	22	60	7x11x9.5
78					79.1										
110.1															
100.1															
BRC30A BRD30A	42	90	31	9	109	72x52	M10x12	72	M6x1	7	15.6	28	26	80	9x14x12.5
99					94.3										
131.3															
121.3															
BRD35A0 BRD35LA	48	100	33	9.5	109	82x62	M10x13	80	M6x1	8	15.6	34	29	80	9x14x12.5
134.8					105.8										
BRD45A0 BRD45LA	60	120	37.5	14	138.2	100x80	M12x15	105	M8x1	8.5	16	45	38	105	14x20x17.5
163					129.8										

型號	參考資料(mm)		基本荷重(Kgf)		容許靜力矩(Kgf*m)			重量	
	Lmax	G	動額定負荷 (C)	靜額定負荷 (C0)	Mx	My	Mz	滑塊(Kg)	滑軌(kg/m)
BRC15A BRD15A	4000	20	850	1350	10.1	6.8	6.8	0.21	1.4
BRC20A BRD20A									
BRC20A BRD20A	4000	20	1400	2400	24	14.6	14.6	0.4	2.6
BRC20A BRD20A									
BRC20A BRD20A									
BRC25A BRD25A	4000	20	1950	3200	36.8	22.8	22.8	0.57	3.6
BRC25A BRD25A									
BRC25A BRD25A									
BRC25A BRD25A									
BRC30A BRD30A	4000	20	2850	4800	67.2	43.2	43.2	1.1	5.2
BRC30A BRD30A									
BRC30A BRD30A	4000	20	3600	6400	89.6	75.4	75.4	1.4	7.2
BRC30A BRD30A									
BRD35A0 BRD35LA	4000	20	3850	6200	105.4	62	62	1.6	7.2
BRD35A0 BRD35LA			4800	8300	141.1	109.8	109.8	2	
BRD45A0 BRD45LA	4000	22.5	6500	10500	236.3	137.8	137.8	2.7	12.3
BRD45A0 BRD45LA			7700	13000	292.5	210.9	210.9	3.6	