


自潤式線性滑軌高組裝
(無法蘭型、加長型)

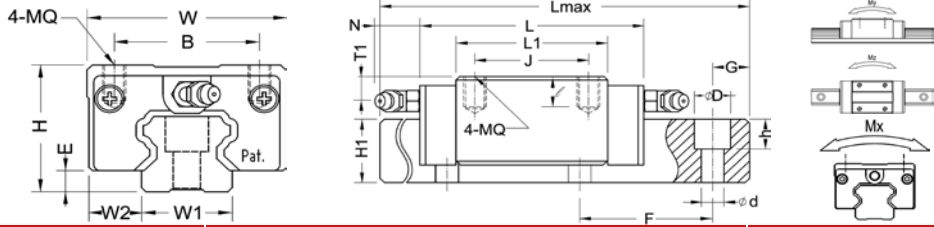

型號	組合尺寸 mm				滑座尺寸 mm							滑軌尺寸 mm			
	H	W	W2	E	L	BxJ	MQxℓ	L1	油孔	T1	(N)	W1	H1	F	dxDxh
BRC15R0	28	34	9.5	4.6	66	26x26	M4x6	40	∅3	8.3	5	15	14	60	4.5x7.5x5.8
BRD15R0					56										
BRC20R0	30	44	12	5	77.8	32x56	M5x8	48.8	M6x1	7	15.6	20	18	60	6x9.5x9
BRD20R0					67.8										
BRC20LR					92.4	32x50									
BRD20LR					82.4										
BRC25R0	40	48	12.5	7	88	35x35	M6x10	57	M6x1	11.8	15.6	23	22	60	7x11x9.5
BRD25R0					78										
BRC25LR					110.1	35x50									
BRD25LR					100.1										
BRC30R0	45	60	16	9	109	40x40	M8x13	72	M6x1	10	15.6	28	26	80	9x14x12.5
BRD30R0					99										
BRC30LR					131.3	40x60									
BRD30LR					121.3										
BRC35R0	55	70	18	9.5	109	50x50	M8x13	80	M6x1	15	15.6	34	29	80	9x14x12.5
BRD35LR					134.8										
BRD45R0	70	86	20.5	14	138.2	60x60	M10x16.5	105	M8x1	18.5	16	45	38	105	14x20x17.5
BRD45LR					163										

型號	參考資料(mm)		基本荷重(Kgf)		容許靜力矩(Kgf*m)			重量							
	Lmax	G	動額定負荷(C)	靜額定負荷(C0)	Mx	My	Mz	滑塊(Kg)	滑軌(kg/m)						
BRC15R0	4000	20	850	1350	10.1	6.8	6.8	0.19	1.4						
BRD15R0															
BRC20R0	4000	20	1400	2400	24	14.6	14.6	0.31	2.6						
BRD20R0															
BRC20LR										1650	3000	30	23.8	23.8	0.47
BRD20LR															
BRC25R0	4000	20	1950	3200	36.8	22.8	22.8	0.45	3.6						
BRD25R0															
BRC25LR										2600	4600	52.9	45.5	45.5	0.56
BRD25LR															
BRC30R0	4000	20	2850	4800	67.2	43.2	43.2	0.91	5.2						
BRD30R0															
BRC30LR										3600	6400	89.6	75.4	75.4	1.2
BRD30LR															
BRC35R0	4000	20	3850	6200	105.4	62	62	1.5	7.2						
BRD35R0															
BRC35LR										4800	8300	141.1	109.8	109.8	1.9
BRD35LR															
BRD45R0	4000	22.5	6500	10500	236.3	137.8	137.8	2.3	12.3						
BRD45LR										7700	13000	292.5	210.9	210.9	2.8