



Adapter Sleeve Dimensions(Inches)

S-00

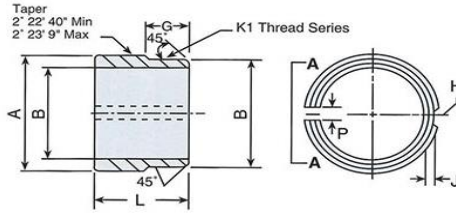

Sleeve Number	Bore Diameter d max	Diameter to Sharp Corner A mm		Length L min		Threads			Slot Width F min	Relief		Lockplate Slot		
		S00	S100	S00	S100	Major Diameter B max	No. per Inch K1	G max		J max	H min	Width P min	Depth T min	
S-04	S-104	0.692	0.855	0.875	1.224	1.46	0.781	32	0.531	0.24				
S-05	S-105	0.754	1.052	1.082	1.259	1.617	0.969	32	0.57	0.24				
S-06	S-106	0.942	1.256	1.292	1.343	1.779	1.173	18	0.632	0.24				
S-07	S-107	1.192	1.459	1.499	1.449	1.922	1.376	18	0.664	0.24				
S-08	S-108	1.317	1.659	1.702	1.494	2.005	1.563	18	0.672	0.365				
S-09	S-109	1.442	1.863	1.909	1.574	2.123	1.767	18	0.672	0.365	0.125	0.062		
S-10	S-110	1.692	2.07	2.122	1.755	2.384	1.967	18	0.734	0.365				
S-11	S-111	1.942	2.273	2.329	1.835	2.506	2.157	18	0.739	0.365				
S-12	S-112	2.067	2.48	2.535	1.979	2.649	2.36	18	0.77	0.365				
S-13	S-113	2.192	2.683	2.739	2.09	2.761	2.548	18	0.802	0.365				
S-14	S-114	2.317	2.894	2.95	2.264	2.935	2.751	18	0.802	0.365	0.188	0.062		
S-15	S-115	2.442	3.09	3.155	2.286	3.074	2.933	12	0.905	0.365	0.188	0.062		
S-16	S-116	2.692	3.293	3.362	2.366	3.194	3.137	12	0.905	0.428	0.188	0.062		
S-17	S-117	2.942	3.497	3.566	2.476	3.302	3.34	12	0.936	0.428				
S-18	S-118	3.192	3.7	3.776	2.636	3.543	3.527	12	1.02	0.428				
S-19	S-119	3.317	3.904	3.982	2.75	3.692	3.73	12	1.051	0.428	0.188	0.062		
S-20	S-120	3.442	4.107	4.199	2.859	3.961	3.918	12	1.083	0.428				
S-21	S-121	3.692	4.314	4.412	2.977	4.157	4.122	12	1.083	0.428				
S-22	S-122	3.942	4.524	4.619	3.196	4.338	4.325	12	1.145	0.428				
S-24	S-124	4.192	4.937	5.035	3.456	4.638	4.716	12	1.176	0.428				
S-26	S-126	4.442	5.35	5.452	3.752	4.972	5.106	12	1.239	0.552	0.281	0.125		
S-28	S-128	4.942	5.757	5.869	3.971	5.313	5.497	12	1.301	0.74				
S-30	S-130	5.192	6.167	6.282	4.231	5.611	5.888	12	1.364	0.74	0.281	0.125		
S-32	S-132	5.442	6.584	6.696	4.568	5.91	6.284	8	1.52	0.74	0.281	0.125		
S-34	S-134	5.942	6.997	7.109	4.837	6.178	6.659	8	1.551	0.865				
S-36	S-136	6.442	7.404	7.522	5.028	6.446	7.066	8	1.583	0.865				
S-38	S-138	6.942	7.814	7.939	5.251	6.748	7.472	8	1.614	0.865				
S-40	S-140	7.192	8.221	8.355	5.474	7.085	7.847	8	1.676	0.99				
S-44	S-144	7.942	9.041	9.153	5.891	7.277	8.628	8	1.708	0.99				
S-48	S-148	8.942	9.878	9.994	6.628	8.099	9.422	6	1.989	0.302			1.125	0.500
S-52	S-152	9.442	10.73	10.83	7.583	8.764	10.192	6	2.135	0.302			1.188	0.500