


Ball Screw (FSU)

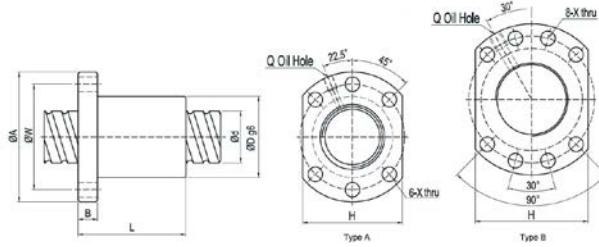

Model No.	Dimension														Ca(Kgf)	Coa(kgf)
	d	l	Da	D	A	B	L	W	X	Type	H	Q	n			
1604-4	16	4	2.381	28	48	10	45	38	5.5	A	40	M6	T4	944	1254	
★1605-3	16	5	3.175	28	48	10	42	38	5.5	A	40	M6	T3	1049	1144	
★1605-4	16	5	3.175	28	48	10	50	38	5.5	A	40	M6	T4	1344	1525	
1610-3	16	10	3.175	28	48	12	65	38	5.5	A	40	M6	T3	1084	1232	
2005-3	20	5	3.175	36	58	10	47	47	6.6	A	44	M6	T3	1181	1496	
★2005-4	20	5	3.175	36	58	10	53	47	6.6	A	44	M6	T4	1512	1995	
2006-3	20	6	3.969	36	58	10	52	47	6.6	A	44	M6	T3	1569	1788	
2010-3	20	10	3.969	36	58	10	68	47	6.6	A	44	M6	T3	1621	1925	
★2504-4	25	4	2.381	40	62	11	46	51	6.6	A	48	M6	T4	1178	2046	
2505-3	25	5	3.175	40	62	10	47	51	6.6	A	48	M6	T3	1330	1936	
2505-4	25	5	3.175	40	62	10	53	51	6.6	A	48	M6	T4	1704	2581	
2510-3	25	10	4.762	40	62	12	75	51	6.6	A	48	M6	T3	2250	2772	
2510-4	25	10	4.762	40	62	12	85	51	6.6	A	48	M6	T4	2881	3695	
★3205-4	32	5	3.175	50	80	12	53	65	9	A	62	M6	T4	1924	3403	
3206-4	32	6	3.969	50	80	12	58	65	9	A	62	M6	T4	2598	4217	
3210-3	32	10	6.35	50	80	16	77.5	65	9	A	62	M6	T3	3775	5877	
3210-4	32	10	6.35	50	80	16	90	65	9	A	62	M6	T4	4834	7835	
★4005-4	40	5	3.175	63	93	16	56	78	9	B	70	M8	T4	2142	4342	
4006-4	40	6	3.969	63	93	14	60	78	9	B	70	M8	T4	2877	5318	
4010-4	40	10	6.35	63	93	18	93	78	9	B	70	M8	T4	5399	10074	
5006-4	50	6	3.969	75	110	15	62	93	11	B	85	M8	T4	3203	6784	
5010-4	50	10	6.35	75	110	18	93	93	11	B	85	M8	T4	5933	12313	
6310-4	63	10	6.35	90	125	18	98	108	11	B	95	M8	T4	6700	16230	
6320-3	63	20	9.525	95	135	20	138	115	13.5	B	100	M8	T3	8957	17945	
8010-4	80	10	6.35	105	145	20	98	125	13.5	B	110	M8	T4	7547	21268	
8020-3	80	20	9.525	125	165	25	143	145	13.5	B	130	M8	T3	10168	23611	

★Can be produced left-hand thread