


Hydraulic Adapter Sleeves

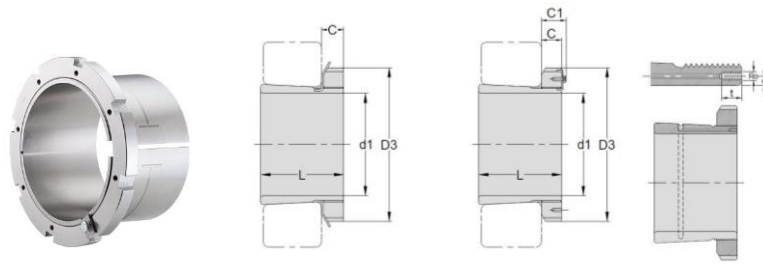

HOH 30

TAPER 1:12

Hydraulic Adapter Sleeve NO.	d1 H mm	L mm	D3 mm	C mm	C ₁ ²⁾ mm	Ro	e mm	t mm	Lock Nut	Lock Washer & Lock Plate	Weight kg
HOH3032	140	93	190	28	-	M6	4.2	8	ANL32	AWL32	5.21
HOH3034	150	101	200	29	-	M6	4.2	8	ANL34	AWL34	5.99
HOH3036	160	109	210	30	-	M6	4.2	8	ANL36	AWL36	6.83
HOH3038	170	112	220	31	-	M6	4.2	8	ANL38	AWL38	7.45
HOH3040	180	120	240	32	-	M6	4.2	8	ANL40	AWL40	9.19
HOH3044	200	126	260	30	41	M6	4.2	8	ANL44	ALL44	10.3
HOH3048	220	133	290	34	46	M6	4.2	8	ANL48	ALL48	13.2
HOH3052	240	145	310	34	46	M6	4.2	8	ANL52	ALL52	15.3
HOH3056	260	152	330	38	50	M6	4.2	8	ANL56	ALL56	17.7
HOH3060	280	168	360	42	54	M6	4.2	8	ANL60	ALL60	22.8
HOH3064	300	171	380	42	55	M6	3.5	8	ANL64	ALL64	24.6
HOH3068	320	187	400	45	58	M6	3.5	8	ANL68	ALL68	28.7
HOH3072	340	188	420	45	58	M6	3.5	8	ANL72	ALL72	30.5
HOH3076	360	193	450	48	62	M6	3.5	8	ANL76	ALL76	35.8
HOH3080	380	210	470	52	66	M6	3.5	8	ANL80	ALL80	41.3
HOH3084	400	212	490	52	66	M6	3.5	8	ANL84	ALL84	43.7
HOH3088	410	228	520	60	77	M8	6.5	12	ANL88	ALL88	65.2
HOH3092	430	234	540	60	77	M8	6.5	12	ANL92	ALL92	69.5
HOH3096	450	237	560	60	77	M8	6.5	12	ANL96	ALL96	73.3
HOH30/500	470	247	580	68	85	M8	6.5	12	ANL100	ALL100	81.8

CS Hydraulic adapter sleeves are supplied completely with lock nuts and lock washers or lock plates.