


# Adapter Sleeve Dimension(Inches)

## S-3000

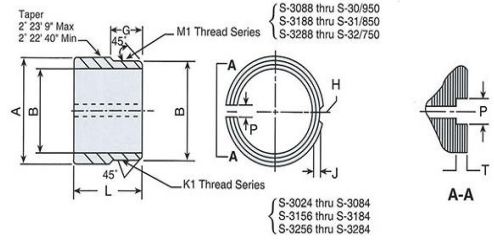

Sleeve Number	Sleeve Bore Dia d max	Diameter to Sharp Corner			Length			Major Diameter B max	Threads No. per Inch K1 M1	G max	Slot Width F min	Relief		Lockplate Slot		
		S-3000 A min	S-3100 A min	S-3200 A min	S-3000 L min	S-3100 L min	S-3200 L min					J max	H min	P min	T min	
S- 3024	4.192	4.89			2.94			4.716	12	1.26	0.428					
S- 3026	4.442	5.3			3.23			5.106	12	1.32	0.552	0.28	0.13			
S- 3028	4.942	5.7			3.33			5.497	12	1.39	0.74					
S- 3030	5.192	6.11			3.48			5.888	12	1.42	0.74	0.28	0.13			
S- 3032	5.442	6.51			3.7			6.284	8	1.48	0.74	0.28	0.13			
S- 3034	5.942	6.93			4.01			6.659	8	1.51	0.865					
S- 3036	6.442	7.35			4.33			7.066	8	1.54	0.865					
S- 3038	6.942	7.74			4.4			7.472	8	1.6	0.865					
S- 3040	7.192	8.16			4.74			7.847	8	1.67	0.99					
S- 3044	7.942	8.98			5.12			8.628	8	1.76	0.99					
S- 3048	8.942	9.77			5.42			9.442	6	1.98	0.302			1.13	0.5	
S- 3052	9.444	10.6			6.01			10.192	6	2.14	0.302			1.19	0.5	
S- 3056	S- 3156	S- 3256	10.444	11.4	11.5	11.6	6.18	7.76	8.94	11.004	6	2.23	2.23	0.302	1.25	0.5
S- 3060	S- 3160	S- 3260	10.944	12.2	12.4	12.5	6.72	8.37	9.63	11.785	6	2.29	2.29	0.302	1.38	0.5
S- 3064	S- 3164	S- 3264	11.944	13	13.2	13.3	6.94	9.1	10.4	12.562	6	2.39	2.39	0.302	1.44	0.5
S- 3068	S- 3168	S- 3268	12.444	13.8	14	14.1	7.53	9.78	11.1	13.303	5	2.54	2.54	0.302	1.5	0.5
S- 3072	S- 3172	S- 3272	13.444	14.6	14.8	15	7.57	9.85	11.4	14.134	5	2.54	2.54	0.365	1.5	0.5
S- 3076	S- 3176	S- 3276	13.944	15.4	15.6	15.8	7.73	10.1	11.9	14.921	5	2.67	2.67	0.365	1.5	0.5
S- 3080	S- 3180	S- 3280	15.006	16.3	16.4	16.6	8.4	10.4	12.7	15.709	5	2.82	2.89	0.365	1.63	0.5
S- 3084	S- 3184	S- 3284	15.756	17.1	17.3	17.5	8.49	11.4	13.3	16.496	5	2.82	2.95	0.365	1.63	0.5
S- 3088	S- 3188	S- 3288	16.506	17.9	18.1	18.3	9.1	11.8	13.9	17.283	5	3.23	3.23	0.365	1.81	0.5
S- 3092	S- 3192	S- 3292	17.006	18.7	18.9	19.1	9.34	12.4	14.6	18.071	5	3.23	3.32	0.365	1.81	0.5
S- 3096	S- 3196	S- 3296	18.006	19.5	19.7	19.9	9.45	12.7	15.2	18.858	5	3.26	3.35	0.365	1.81	0.5
S-30/500	S-31/500	S-32/500	18.506	20.3	20.6	20.8	9.84	13.7	16.5	19.646	5	3.57	3.67	0.365	1.81	0.5
S-30/530	S-31/530	S-32/530	19.506	21.5	21.8	22.1	10.6	14	17.3	20.827	4	3.57	3.67	0.49	1.81	0.5
S-30/560	S-31/560	S-32/560	21.006	22.7	23	23.3	11.2	14.6	17.9	22.008	4	3.82	3.92	0.49	1.81	0.5
S-30/600	S-31/600	S-32/600	22.006	24.3	24.6	24.9	11.5	15.4	18.9	23.583	4	3.92	3.92	0.49	1.81	0.5
S-30/630	S-31/630	S-32/630	24.006	25.5	25.9	26.2	11.9	16	19.8	24.764	4	3.92	3.92	0.49	2	0.5
S-30/670	S-31/670	S-32/670	25.006	27.2	27.5	27.9	12.8	17	21	26.339	4	4.1	4.1	0.49	2	0.625
S-30/710	S-31/710	S-32/710	26.506	28.8	29.1	29.5	13.5	17.8	21.9	27.914	3	4.54	4.64	0.49	2	0.625
S-30/750	S-31/750	S-32/750	28.006	30.4	30.8	31.1	14.1	18.6	23	29.489	3	4.54	4.64	0.49	2	0.625
S-30/800	S-31/800		29.506	32.4	32.8		14.4	19		31.457	3	4.54	4.64	0.49	2	0.625
S-30/850	S-31/850		31.506	34.4	34.8		15	20		33.426	3	4.57	4.76	0.49	2	0.625
S-30/900			33.506	36.4			15.7			35.394	3	4.95		0.49	2	0.625
S-30/950			36.506	38.4			16.5			37.363	3	4.95		0.49	2	0.625